

Datasheet

CX8001F



General

- Indoor
- General Light
- Install onto the track
- Profile Inset
- Housing: black
- System Output: 360lm
- IP 20

LED



- 2700K/3000K/3500K/4000K/5000K
- CRI>90
- 50000h@L80B10
- SDCM: 3

Optics

- Beam angle: 16°/24°/36°
- UGR <15

Electric

- LED Driver: ON-OFF
- LED Power: 6W
- 48V




Dimensions

- Measurement: Ø38mm
- Height: 495mm

Description

- Magnetic Suspended Light Inset with ON-OFF;
- Black painted finish (RAL 9005);
- LED 6W;
- Measurement Ø38mm; height of the suspended light is 495mm; wide of the profile inset is 186mm;
- High color rendering at an index of CRI90;
- After a lifetime of 50000h min. 80% of the luminous flux with energy efficient Luminus LED Chips;
- 5 years warranty;
- Precise beam characteristic with 16°/24°/36° beam angles;
- Lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1 (UGR<15);
- Degree of housing protection according to DIN EN 60529 (IP20).


Light distribution



6W 16°				6W 24°				6W 36°			
Lux				Lux				Lux			
h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax	h(m)	d(m)	Em	Emax
1	0.25	2433	3518	1	0.54	2208	3424	1	0.7	1287	1853
2	0.50	608.3	879.5	2	1.08	552	856	2	1.4	321.8	463.3
3	0.75	270.3	390.9	3	1.62	245.4	380.4	3	2.1	143	205.9



Technical drawing

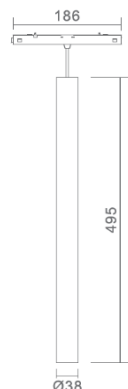

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors.